

### Manage IW/DAMA/DASA Services

A turnkey trainer/simulator for UHF satellite communications (SATCOM), Viasat DOCCT/S has the flexibility to address an entire range of UHF DAMA and IW satellite communications equipment training, integration, and mission rehearsal requirements.



### TRAIN, INTEGRATE, REHEARSE PRIOR TO GOING OVER-THE-AIR

Viasat DOCCT/S replicates Demand Assigned Multiple Access (DAMA) and Integrated Waveform (IW) network control station and legacy network terminal operations. Internal satellite simulation includes frequency translation, digital transponder band-limiting and hard-limiting, variable digital propagation delay, and thermal noise. Viasat DOCCT/S empowers developing, integrating, and training on UHF satellite communications equipment, without the expense and time constraints associated with accessing live satellite channels.

### COMPACT, RUGGED, PORTABLE—RACK-MOUNTED COMPONENTS IN A SHOCK-PROOF CASE

The Viasat DOCCT/S terminal architecture is based on Viasat's RT-1828 UHF SATCOM network terminal, with additional hardware and software to emulate network control and communication over a UHF satellite transponder. A set of five VME modules consisting of an I/O module, DSP module, transmitter module, receiver module, and satellite simulator module in a Viasat DOCCT/S terminal replicates one UHF SATCOM channel.

### 5 KHZ & 25 KHZ CHANNELS—PER MIL-STD-188-181B/C, -182A, -183B, -183, -183A, -185A

Viasat designed and developed the fielded and JITC-assessed IW Phase 2 Channel Control system, providing increased bandwidth efficiency and communications quality. Viasat DOCCT/S reproduces IW Phase 2 Channel Control system software in the rack-mount PC so terminal login and communications service requests are handled with the MIL-STD required protocol. Viasat DOCCT/S also includes free training (in CONUS) covering DAMA/IW theory, operation, maintenance, and troubleshooting procedures for up to one year after delivery.

### ACHIEVE PROJECT OBJECTIVES—CONFIGURE OPERATION PARAMETERS

Viasat DOCCT/S is easy to configure. Put in a single-channel terminal to simulate one UHF SATCOM channel, or a multi-channel terminal to simulate up to four channels. Add an optional orderwire encryption board (OEB) for DOCCT/S to transmit encrypted orderwires. DOCCT/S Multiport UHF Interface Drawer (MUID) allows up to four user network terminals to connect directly at UHF. Configure DOCCT/S for local RF operation to enable up to 2,000 additional user network terminals to participate in LOS UHF SATCOM via antenna at ranges up to 12 miles. Up to four user baseband I/O devices per simulated channel may also be connected to Viasat DOCCT/S so that it may also operate as a network terminal for UHF waveforms.

## SPECIFICATIONS

### OPERATING MODES

<b>IW</b>	5/25 kHz, MIL-STD-188-181C, -182B, -183B, -185A
<b>DAMA/DASA</b>	5 kHz, MIL-STD-188-182A; 25 kHz, MIL-STD-188-183- and 183A supported
<b>Dedicated Access</b>	MIL-STD-188-181B and other waveforms

### PERFORMANCE

#### Satellite Simulation

- » Frequency translation
- » Digital band-limiting and hard-limiting
- » Variable digital propagation delay
- » Variable digital thermal noise

#### Channel Simulation

- » 1 to 4 UHF SATCOM channels; 1 channel per set of 5 removable 6Ux160 VME I/O, DSP, Receiver, Transmitter, and SatSim modules
- » Multi-channel system based on Viasat RT-1828 9U 20-slot network terminal
- » Encrypted orderwire via optional NSA-endorsed Orderwire Encryption Board (OEB)

#### User Terminal

<b>Transmit Frequency</b>	292 to 318 MHz
<b>Receive Frequency</b>	243 to 270 MHz

**Interoperability** All JITC assessed UHF SATCOM terminals

#### User Interface (Direct Connection)

- » 1 to 4 user terminals in addition to local RF (direct connection) connected user terminals
- » Provisions for half or full-duplex user terminals via MUID N-type connectors
- » RF input power protection up to 250 W
- » Provisions for remote user terminal location via user variable downlink attenuation

#### User Interface (Local RF Connection)

- » 1 to 2,000 user terminals in addition to directly connected user terminals
- » Configuration options for up to 1 mile or up to 12 mile range

#### User Baseband I/O

- » 4 serial baseband I/O ports per channel with MIL-STD-188-114 and RS-232/RS-422 interface
- » Interoperable with KY-57, KY-58, KY-99, KY-100, KIV-7, KYV-5, KG-84, AN/USC-42, VDC-550, VDC-850

#### User I/O Rates (bps)

- » **IW** 75, 300, 600, 1200, 2400, 4800, 6000, 7200, 8K, 9.6K, 16K, 19.2K, 28.8K, 32K, 38.4K, 48K, 56K
- » **5 kHz DAMA** 75, 300, 600, 1200, 2400
- » **25 kHz DAMA** 75, 300, 600, 1200, 2400, 4800, 16K
- » **Non-DAMA** 1200, 2400, 4800, 6000, 7200, 8000, 9600, 19.2K, 16K, 28.8K, 32K, 38.4K, 48K, 56K

### PERFORMANCE (CONTINUED)

<b>Modulation</b>	SOQPSK, BPSK, DEQPSK, (S)BPSK, FSK, CPM
<b>Cryptographic Keyfill</b>	KYK-13, KYX-15, KOI-18, AN/CYZ-10, SKL
<b>External Reference</b>	1, 5, or 10 MHz

#### Operator Interface

- » UHF DAMA/IW NCS network management and planning tool
- » Terminal operation documentation via printable event log and alarm display
- » Windows® 10 operating system

#### Storage Devices

- » 160 GB or greater hard disk drive
- » CD-ROM drive

#### Portability, Transportability


- » Shock-proof, fungus-resistant, water-tight, air-tight, portable case equipped with internal storage pouch and stainless external hardware including anti-shear locks, 90° stop metal handles, lifting/tiedown rings, coupling catches, locking cables/hasps, and removable swivel-style castors
- » Turnkey set-up with pre-installed 19 in. rack-mount components, rack-mounted PC and factory-preset database parameters
- » User-configurable database parameters for custom default start-up configuration

### MECHANICAL

<b>Dimensions (W x H x D)</b>	29 x 34 x 30 in.
<b>Weight</b>	230 lb. (two-channel system)
<b>Power</b>	110 to 240 V to all installed equipment

### GENERAL

<b>Technical Documentation</b>	Commercial Operation and Maintenance Manual (English)
<b>Hardware Warranty</b>	One year on Viasat, Inc. manufactured items, with 30-day turn-around time at Viasat, Inc. depot maintenance facility
<b>Installation and Training</b>	Provided at delivery, in English

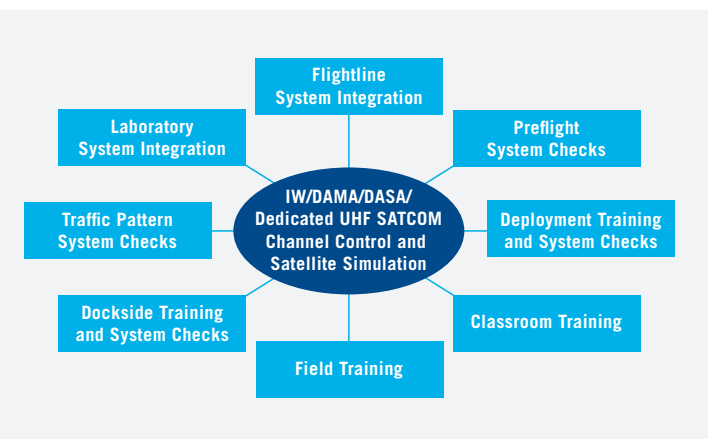

## CONTACT

#### SALES

**EMAIL** insidesales@viasat.com  
**TEL** +1 888 VIASAT1 (842 7281) (US Toll Free)  
 +1 760 476 4722  
**FAX** +1 760 683 6815

#### TECHNICAL SUPPORT

**EMAIL** noc.carlsbad@viasat.com  
**TEL** +1 888 272 7232 (US Toll Free)  
 +1 760 476 2600 (International)

