

WEB-BASED INTERFACE



The Viasat Radio Frequency Generator 1000 (VRG-1000) is the only AIMS certified, true-to-life environment generator for testing Identification, Friend or Foe (IFF) systems in high-density signal environments. With 50 independent interactive IFF interrogator or 25 independent interactive transponder platforms, this test set brings realistic signal testing on-location to your installed or in-development IFF system, so you can replicate crowded airspace and reduce flight test time by evaluating your system in a lab.

ONLY AIMS CERTIFIED IFF ENVIRONMENT GENERATION TEST SET

This portable RF environment generator includes an intuitive graphical interface that works with a standard web-based browser, no additional software needed. The operator can create and control a test scenario that includes moving platforms, each with an IFF interrogator or transponder. Each IFF interrogator and transponder can be associated with an antenna pattern to create a dense, robust, and realistic IFF environment. The System Under Test (SUT) is presented with interactive IFF replies that have the correct relative time delay and amplitude, so they can be received and analyzed as they would in dynamic operation. For advanced antenna testing, a sum and difference channel configuration (VRG-1000SD) is available upon request.

With an established library of IFF signals, independent control of all transponders and interrogators, and a convenient compact design, Viasat's VRG-1000 delivers easy and accurate IFF signal testing to your system.

VRG-1000/VRG-1000SD AT-A-GLANCE

High-Density Signal Environment

- » Supports test scenarios with up to 50 independent IFF platforms
 - Up to 25 in-beam Mode 5 replies
 - Up to 32 simultaneous garbled signals
 - Transponder antenna diversity testing
 - Interrogator sum and difference channels

Independent Signal Control

- » Provides all Mark XIIIA modes, including 1, 2, 3/A, C, S, 4, and 5
- » ADSB and M5L2
- » Includes Viasat's Software Defined Waveform processor for support of current and potential new waveforms
- » In-chassis interface for KIV-77 cryptographic equipment

Dynamic RF Environment

- » Simulation engine enables dynamic platforms and realistic RF environments accounting for path loss, antenna patterns, delay, and more

Compact, Portable Design

- » Bring IFF interrogator and transponder signal testing to your system

Data Extraction

- » Capture information about all RF generated and received for detailed post-test analysis

DIS Platform Control

- » Coordinate platform movement with radar target generators

Viasat Radio Frequency Generator 1000

SPECIFICATIONS

INTERROGATION GENERATION

Modes Supported	1, 2, 3/A, C, 4, S, 5, and All-Call
Frequency	1030 MHz
Amplitude	-90 to +6 dBm
PGRI	10 to 2.5 ms

INTERROGATION RECEPTION

Modes Supported	1, 2, 3/A, C, 4, S, 5, and All-Call
Frequency	1030 MHz
Amplitude	
» VRG-1000	-50 to 0 dBm
» VRG-1000SD	+15 to +65 dBm

SCENARIO FEATURES

- » Up to 50 moving IFF platforms
- » 6 degrees of freedom (latitude, longitude, altitude, heading, pitch, roll)
- » Transmit/receive antenna patterns
- » Realistic RF environment accounting for path loss and pointing angles
- » DIS (platform motion) interface
- » Reception of external antenna pointing angle
- » Data extraction for detailed post processing

TRANSPONDER GENERATION

Modes Supported	1, 2, 3/A, C, 4, S, M5L1, M5L2 and ADS-B
Frequency	1090 MHz
Amplitude	-90 to +6 dBm
Sum/Difference Channels	VRG-1000SD version

TRANSPONDER RECEPTION

Modes Supported	1, 2, 3/A, C, 4, S, M5L1, M5L2 and ADS-B
Frequency	1090 MHz
Amplitude	
» VRG-1000	-50 to 0 dBm
» VRG-1000SD	+15 to +65 dBm


GENERAL

Optional External Reference	10 MHz, +10 dBm
Control Interface	Ethernet
RF Interface Connectors	N-Type/TNC
Operating Temperature	-10° to +40° C
Power	110 to 240 VAC, 5A, 50/60 Hz
Dimensions (W x H x D)	19 x 7 x 27 in.
Weight	40 lb

PART NUMBERS

VRG-1000 (w/ Transponders)	1199118
VRG-1000SD (w/ Transponders)	1170355

REPLICATE CROWDED AIRSPACE WITH HIGH-DENSITY SIGNAL TESTING

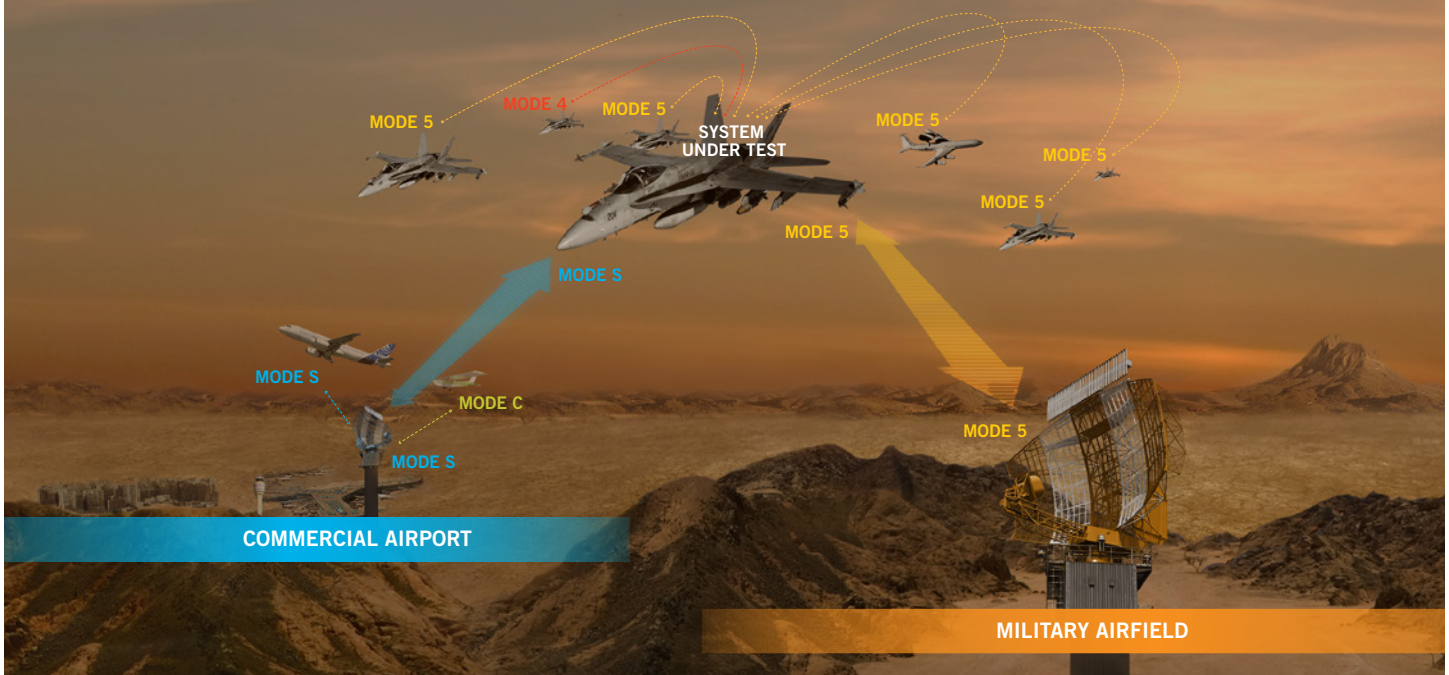

CONTACT

SALES

TEL +1 760 476 2506 EMAIL rf.environment@viasat.com WEB www.viasat.com

UNITED STATES Carlsbad, CA & Washington, DC TEL +1 760 476 4755 FAX +1 760 683 6815 EMAIL insidesales@viasat.com

UNITED KINGDOM Wareham TEL +44 0 1929 55 44 00 FAX +44 0 1929 55 25 25 EMAIL sales@viasat.uk.com

AUSTRALIA Canberra TEL +61 0 2 61639200 FAX +61 0 2 61622950 EMAIL gov.australia@viasat.com

Copyright © 2019 Viasat, Inc. All rights reserved. Viasat and the Viasat logo are registered trademarks of Viasat, Inc. All other product or company names mentioned are used for identification purposes only and may be trademarks of their respective owners. Specifications and product availability are subject to change without notice. 821346-190321-043

